



## STANDARD RANGE

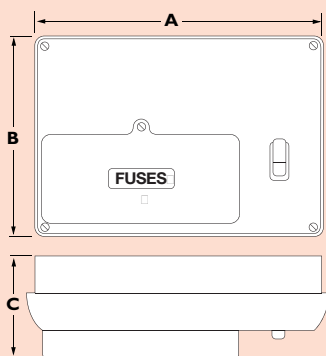

### INSULATED - MAIN SWITCH ISOLATOR

CAT REF	DIMENSIONS		
	A	B	C
104	98	121	68
204	125	120	70
304	190	155	95
404	190	155	95
604	272	186	103
804	323	186	103
108/160/160C	143	178	99



### METAL - MAIN SWITCH ISOLATOR

CAT REF	DIMENSIONS		
	A	B	C
206	140	131	93
306	210	153	99
406	210	153	99
606	293	210	104


### METAL - 45A AND 60A SWITCHFUSES

CAT REF	DIMENSIONS		
	A	B	C
106	112	131	80
108M/160CM	172	242	98

### METAL - 100A DOUBLE POLE SWITCHFUSE


CAT REF	DIMENSIONS		
	A	B	C
110M	178	305	76
110M/80	178	305	76
110M/63	178	305	76

## ENCLOSURES



CAT REF	IP RATING	DIMENSIONS		
		A	B	C
ESE2	IP40	60	153	60
ESE2L	IP20	60	140	60
WBE3	IP65	85	160	114
ESI4	IP40	100	150	68
ESM6	IP40	90	225	62
ESM7	IP54	90	225	89
ESE4	IP20	77	140	65
WBE4	IP65	110	160	114
ESM11	IP54	120	225	95
ESM13	IP54	137	318	104
ESM8	IP40	120	225	70

## ISOLATORS



CAT REF	DIMENSIONS			Terminal Capacity
	A	B	C	
832A	62	76	30	10
860A	57	79	29	25

CAT REF	DIMENSIONS			Terminal Capacity
	A	B	C	
921X	72	45	48	10
921E	114	133	61	10
REC2S	78	150	65	50
REC2	100	150	65	50
REC3	100	150	65	50
REC4	100	150	65	50

74

Standard Range - Dimensions