



# N-Type ABC Comet Series

AIKO-A-MAH72Mw

Up to **24.0%**  
**600W-620W**



Product  
Warranty



Performance  
Warranty



reddot winner 2023

## Premium Appearance

No grid lines on the front

## Higher Power Output

Higher efficiency: 24.0%

Lower degradation: 1 year  $\leq 1.0\%$ , 2 -30 year  $\leq 0.35\%$

Better temperature coefficient:  $-0.26\%/^{\circ}\text{C}$

## Optimized Balance of System (BOS)

Significant savings on mounting structure, cabling, and labour cost

## Complete Set of Quality Management System

IEC 61730 (2016) IEC 61215 (2021)

ISO 9001:2015 Quality Management System

ISO 14001:2015 Environmental Management System

ISO 45001:2018 Occupational Safety and Management System





**620W**  
Output

**24.0%**  
Efficiency

**≤1%**  
First-year Degradation

**≤0.35%**  
Annual Degradation from Year 2-30

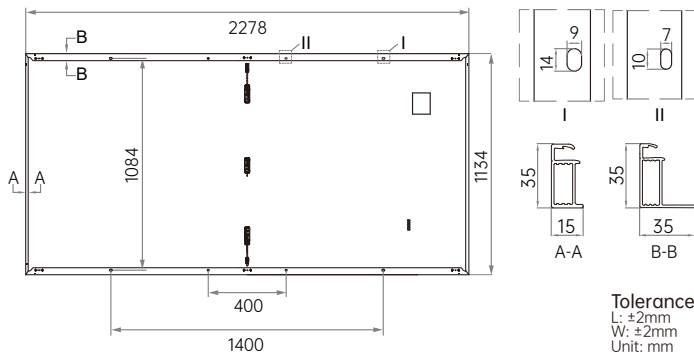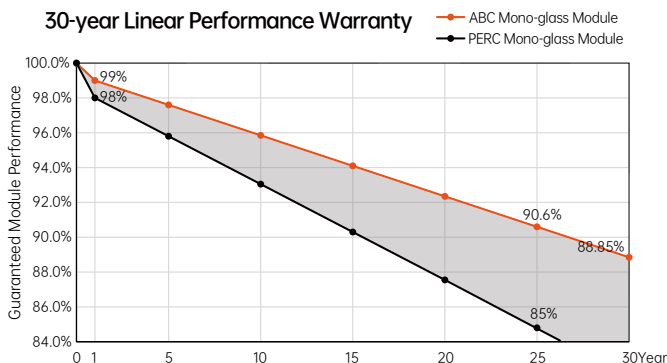

Electrical Characteristics (STC: AM1.5 1000W/m <sup>2</sup> 25°C NOCT: AM1.5 800W/m <sup>2</sup> 20°C 1m/s)										Power Tolerance: 0~ +3%	
Model	AIKO-A600-MAH72Mw		AIKO-A605-MAH72Mw		AIKO-A610-MAH72Mw		AIKO-A615-MAH72Mw		AIKO-A620-MAH72Mw		
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
$P_{max}$ [W]	600	452	605	456	610	459	615	463	620	467	
$V_{oc}$ [V]	53.99	50.99	54.09	51.08	54.19	51.18	54.29	51.27	54.39	51.36	
$V_{mp}$ [V]	44.68	42.19	44.78	42.29	44.88	42.38	44.98	42.48	45.08	42.57	
$I_{sc}$ [A]	14.20	11.48	14.28	11.55	14.36	11.61	14.44	11.68	14.52	11.74	
$I_{mp}$ [A]	13.43	10.72	13.52	10.79	13.60	10.85	13.68	10.91	13.76	10.98	
<b>Module Efficiency</b>	<b>23.2%</b>		<b>23.4%</b>		<b>23.6%</b>		<b>23.8%</b>		<b>24.0%</b>		

Mechanical Specification	
Cell Type	N-Type ABC
Front Cover Mono glass	3.2 mm tempered glass
Frame	Anodized aluminum
Cable	4mm <sup>2</sup> (IEC) 12AWG(UL) 1400mm or Customized Length
No. of Cells	144(6*24)
Junction Box	IP68, three bypass diodes
Connector	MC4 compatible
Weight	28.2kg±3%
Dimension	2278*1134*35mm
Package Detail	31pcs per pallet/155 pcs per 20' GP/620pcs per 40' HQ

Temperature Ratings (STC)	
Temperature Coefficient of $I_{sc}$	+ 0.05%/ °C
Temperature Coefficient of $V_{oc}$	- 0.22%/ °C
Temperature Coefficient of $P_{max}$	- 0.26%/ °C

Installation Guide	
Operation Temperature	- 40°C~+85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
$V_{oc}$ and $I_{sc}$ Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class C